

# SMART TROLLEY



©Smart Lift A/S

## ST 1300

### ELECTRIC MATERIAL TRANSPORT

The ST 1300 is a rugged and self-propelled transport trolley for plasterboards and similar building materials on construction sites.

The trolley has a hydraulic lifter, which extends up to 90 cm above ground level and can be used as a workbench for better ergonomics.

- Self-propelled forward/reverse
- Quality bearings and tilting joints
- Capable of driving in terrain
- Battery voltage indicator
- For indoor and outdoor use
- Extendable frame and side bars for long elements



LIFTING CAPACITY

**1,300 KG** / 2,866 LBS.



LIFTING HEIGHT


**90 CM** / 35 IN.



OPERATING TIME

**8 HRS.**

***Smart lift®***

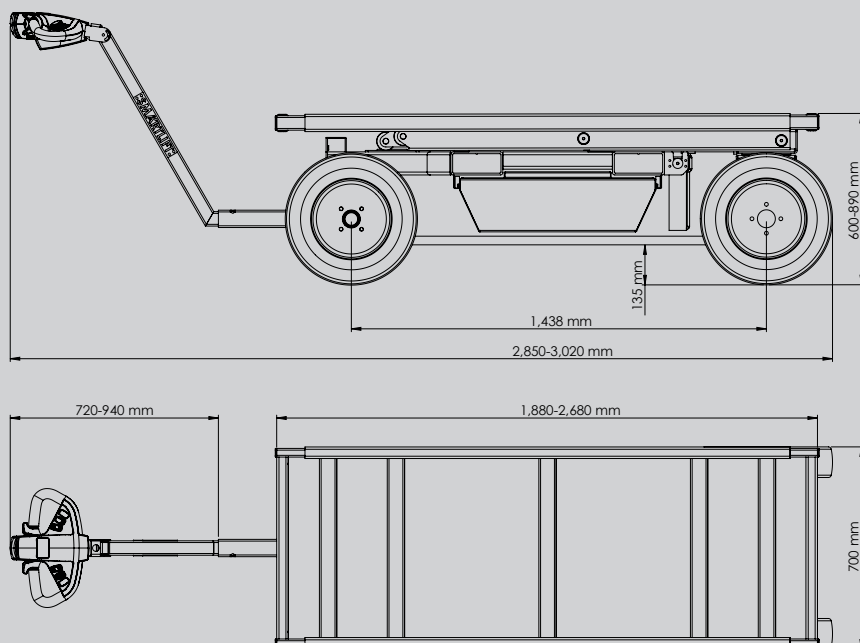

## THE SAFE CHOICE

Smart Lift A/S manufactures quality lifts for the construction industry. Our dedication is your guarantee for precision, durability and quality at the highest level which characterises any Smart Lift product.

The Smart Lift range consists of a variety of glass lifts, ranging from standard models to customised solutions and a wide selection of accessories.

Experience a safer and more efficient way of working – use Smart Lift.

## TECHNICAL SPECIFICATIONS

SWL / rated load	1,300 kg / 2,866 lbs.
Floor dimensions	1,880 x 700 mm / 2,680 mm x 700 mm
	74 x 28 in. / 106 x 28 in.
Floor height	600 - 900 mm / 23 - 35 in.
Total length	2,850 mm / 112 in.
Total length when shipped	2,100 mm / 83 in.
Wheel base	1,438 mm / 57 in.
Extension - handlebar	220 mm / 9 in.
Ground clearance	135 mm / 5 in.
Raise / lower floor	10 sec.
Driving speeds	Floor raised = 1 km/h / 0.6 mph. Floor lowered = 5 km/h / 3.1 mph.
Battery	2 x 12V 95Ah
Operating time	8 hours
Wheels	Foam-filled off-road tires
Turning radius	3.1 m / 10.2 ft.
Charger with indicator	Integrated 110V / 230V
Curb weight	450 kg / 1,000 lbs.



Prepared for forklift



Battery indicator on drive handle



Quality bearings allow tilting motion



Puncture-free tires